Note
See Planting Plan drawings for all planting species, type, quantity, location and densitity.
See LD-01-PP for planting details.
See Softworks Specification for all planting and aftercare details.

TREATMENT 1 - to tree planting

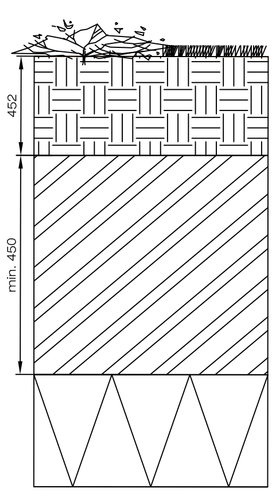

FINISH GRASS/ SHRUBS	
TOPSOIL	TOPSOILED, FERTILISED TO SPECIFICATION SEE LANDSCAPE ARCHITECTS SPECIFICATION
SUBSOIL	- CLEAN SUBSOIL, FREE DRAINING, FREE FORM RUBBISH BUILDING CONTAMINATION, LARGE STONES ROCKS - LAID IN LAYERS MAX 250 - 300MM - DEPTH VARIES TO MAKE UP SITE LEVELS AS PER ENGINEER'S SPECIFICATION
SUB-FORMATION (WHERE REQUIRED)	- REMOVE ALL DEBRIS, BUILDING CONTAMINATION, STONES/ ROCKS > 150MM FROM FORMATION SURFACE - DECOMPACT DURING DRY WEATHER BY; (i) BACK-ACTOR OF HYMAC TO 450MM DEPTH; OR (ii) 3-5 TYNE RIPPER MOUNTED ON CRAWLER TRACTOR @ 1200 CTR - ASCERTAIN LOCATION OF ALL SERVICE RUNS PRIOR TO DECOMPACTION. WHERE AFFECTED, THEY SHALL BE SEELED OFF AND PROTECTED
NOTE	ALL GROUND PREPARATION TO ENGINEER'S SPECIFICATION

TREATMENT 2 - to shrub planting areas

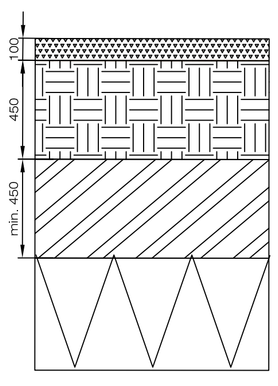

BARK MULCH	APPLIED AFTER PLANTING IS FINISHED TO FINISH FLUSH WITH KERBING
TOPSOIL	TOPSOILED, FERTILISED TO SPECIFICATION SEE LANDSCAPE ARCHITECTS SPECIFICATION
SUBSOIL	- CLEAN SUBSOIL, FREE DRAINING, FREE FORM RUBBISH BUILDING CONTAMINATION, LARGE STONES ROCKS - LAID IN LAYERS MAX 250 - 300MM - DEPTH VARIES TO MAKE UP SITE LEVELS AS PER ENGINEER'S SPECIFICATION
SUB-FORMATION (WHERE REQUIRED)	- REMOVE ALL DEBRIS, BUILDING CONTAMINATION, STONES/ ROCKS > 150MM FROM FORMATION SURFACE - DECOMPACT DURING DRY WEATHER BY; (i) BACK-ACTOR OF HYMAC TO 450MM DEPTH; OR (ii) 3-5 TYNE RIPPER MOUNTED ON CRAWLER TRACTOR @ 1200 CTR
NOTE	ALL GROUND PREPARATION TO ENGINEER'S SPECIFICATION

TREATMENT 3 - to grass planting areas



	TOPSOILED, FERTILISED AND GRASS SEEDED OR TURFED TO SPECIFICATION TO FINISH 30MM ABOVE KERBING
SUBSOIL	- CLEAN SUBSOIL, FREE DRAINING, FREE FORM RUBBISH BUILDING CONTAMINATION, LARGE STONES ROCKS - LAID IN LAYERS MAX 250 - 300MM - DEPTH VARIES TO MAKE UP SITE LEVELS AS PER ENGINEER'S SPECIFICATION
SUB-FORMATION	- REMOVE ALL DEBRIS, BUILDING CONTAMINATION, STONES/ ROCKS > 150MM FROM FORMATION SURFACE
NOTE	ALL GROUND PREPARATION TO ENGINEER'S SPECIFICATION

* NOTE: All topsoil to be inspected and approved by Landscape Architect prior to spreading / backfilling

Detail D 01 Drawing LD-02-PP
Topsoil depths to tree planted areas
Scale @ 1:20

doyle + o'troithigh landscape architecture ltd.

Note:

Legend

Rev.	Date.	Note.

Project name: KEERAUN Social Housing

Project number: 21-009

Drawing name: Softworks Landscape Topsoil Depth Details

Drawing number: LD-02-PP

Drawing scale @ A1: 1:20

Drawn by: d+ot

Checked by: ld

Status: Planning Application

date: 17.06.2021

Contact details:
Linda Doyle (Director) mobile: 087 267 4196
e-mail linda@doyle-otroithigh.com
Daithí oTroithigh (Director) mobile: 086 300 3499
e-mail daithi@doyle-otroithigh.com

Office address:
Pembroke House,
28-32 Upper Pembroke St,
Dublin 2.

doyle + o'troithigh
landscape - architecture

www.doyle-otroithigh.com